



TYPE 'A'

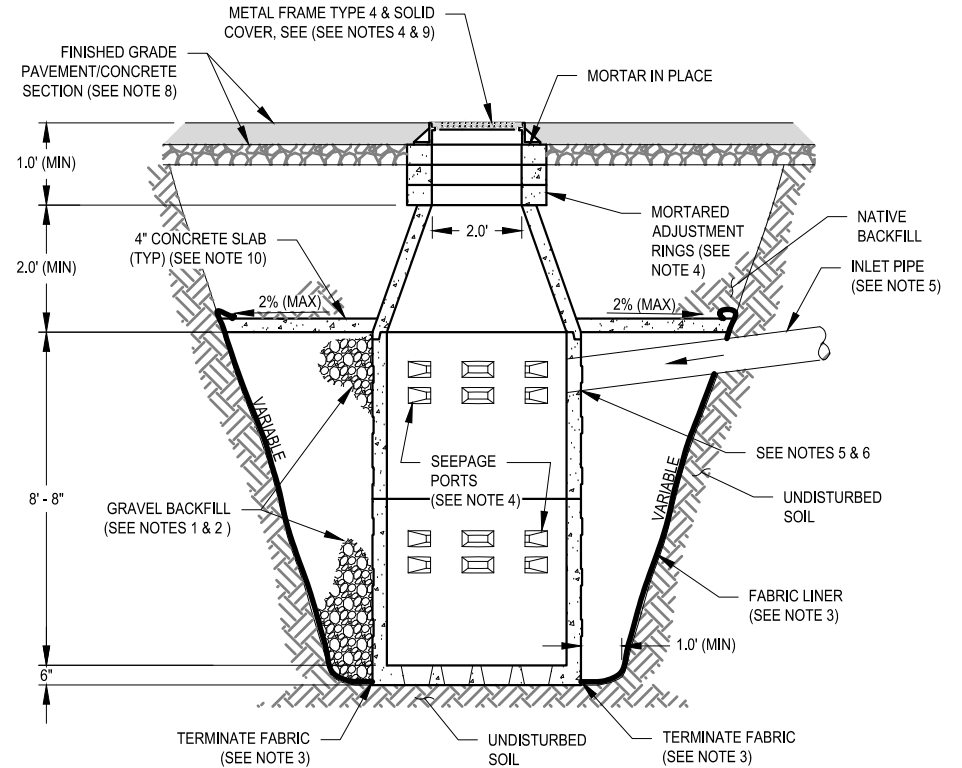

TYPE 'B'

GENERAL NOTES:

- GRAVEL BACKFILL QUANTITY FOR DRYWELLS:
TYPE "A" - 30 CUBIC YARDS MINIMUM / 42 TONS.
TYPE "B" - 40 CUBIC YARDS MINIMUM / 56 TONS.
OR AS SPECIFIED ON STREET PLANS.
- GRAVEL BACKFILL FOR DRYWELLS SHALL BE WASHED DRAIN ROCK CONFORMING TO WSDOT STANDARD SPEC. 9-03.12(5).
- FABRIC SHALL BE MODERATE SURVIVABILITY AS OUTLINED IN WSDOT STANDARD SPEC. 9-33.2(1). FABRIC SHALL NOT BE WRAPPED AROUND DRYWELL BARRELS OR PLACED ON THE BOTTOM OF THE BARREL.
- SEE PRECAST DRYWELL DETAILS, CITY STANDARD PLANS S-103 AND S-105. PRECAST MORTARED ADJUSTMENT RINGS SHALL BE USED IN LIEU OF ADJUSTING BLOCKS
- WHEN PVC PIPE IS USED, A SAND COLLAR SHALL BE INSTALLED.
- PIPES SHALL BE GROUTED INTO DRYWELL WITH WATERPROOF NON-SHRINK GROUT IN ACCORDANCE WITH STANDARD SPECIFICATION 9-20.3.
- GRAVEL BACKFILL TO BE COMPLETELY COVERED WITH FABRIC.
- MATERIAL COMPACTION SHALL MEET WSDOT STANDARD SPEC. 2-03.3(14)C, METHOD B.
- UTILITY ADJUSTMENT SHALL MEET CITY STANDARDS, SEE STANDARD CITY PLAN UTILITY COVER ADJUSTMENT.
- CONCRETE SLAB SHALL BE CLASS 3000 CONCRETE.

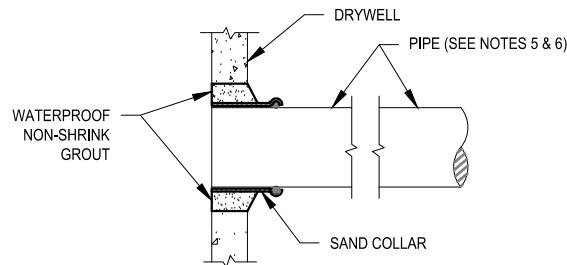

PVC ADAPTER



APPROVED BY:

Robert B. Blegen

ROBERT B. BLEGEN, P.E.
PUBLIC WORKS DIRECTOR

**PRECAST DRYWELLS
PLACED IN ASPHALT**

**STANDARD PLAN NO.
S-102**

PUBLICATION DATE: 03/2025

REVISION NO.: 01