


GENERAL NOTES:

1. THE CASTINGS SHALL BE GRAY IRON CASTINGS, AASHTO DESIGNATION M-105, CLASS 30B. THE COVER AND SEAT SHALL BE MACHINED SO AS TO HAVE CONTACT AROUND THE ENTIRE CIRCUMFERENCE AND FULL WIDTH OF BEARING SURFACE.
2. WHEN THE MONUMENT CASE AND COVER ARE PLACED IN CEMENT CONCRETE PAVEMENT THE CONCRETE BASE IS NOT NEEDED.
3. MONUMENT TYPE I TO BE USED FOR PLACING NEW OR REPLACEMENT OF SECTION CORNERS, QUARTER CORNERS, CLOSING CORNERS, WITNESS CORNERS, AND MEANDER CORNERS.
4. MONUMENT TYPE II TO BE USED FOR NEW OR REPLACEMENT OF ROAD INTERSECTION POINTS, ROAD CENTERLINE ANGLE POINTS, AND CURVE POINTS.
5. A 5/8" REBAR DRIVEN INTO THE ASPHALT, RECESSED 1/2" WITH A PLASTIC CAP IS AN ACCEPTABLE ALTERNATIVE, FOR A TYPE II MONUMENT, IN NEWLY CONSTRUCTED ROADS. THE PLASTIC CAP SHALL BE STAMPED WITH SURVEYOR'S LICENSE NUMBER.
6. REFER TO SECTION 7.5.15.2 FOR ADDITIONAL DETAILS.

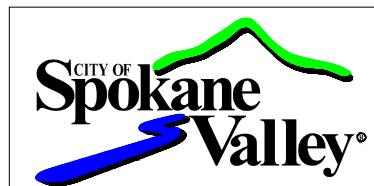

APPROVED BY:

ROBERT B. BLEGEN, P.E.
PUBLIC WORKS DIRECTOR

SURVEY MONUMENTS

STANDARD PLAN NO.
R-145

PUBLICATION DATE: 03/2025

REVISION NO.: 01