



STREETS WITH ADJACENT SIDEWALK

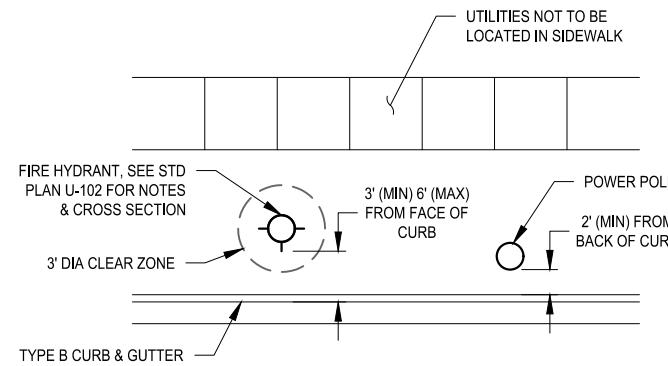

STREETS WITH SEPARATED SIDEWALK

GENERAL NOTES:

1. WHENEVER POSSIBLE, HYDRANTS SHALL BE LOCATED NEAR INTERSECTIONS.
2. PLACEMENT TO MEET ALL APPLICABLE CLEAR ZONE REQUIREMENTS.
3. THE PREFERRED LOCATION OF POWER POLES FOR NEW STREETS WITH SEPARATED SIDEWALK IS BEHIND THE SIDEWALK; HOWEVER, IF THE POWER POLE IS INSTALLED WITHIN THE PLANTER STRIP, THEN THE FACE OF POWER POLE SHALL BE SET 2' (MIN.) FROM BACK OF CURB.

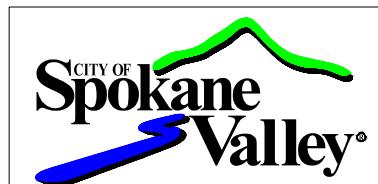

APPROVED BY:

ROBERT B. BLEGEN, P.E.
PUBLIC WORKS DIRECTOR

ABOVE GROUND
UTILITY LOCATIONS

STANDARD PLAN NO.
U-101

PUBLICATION DATE: 03/2025

REVISION NO.: 01